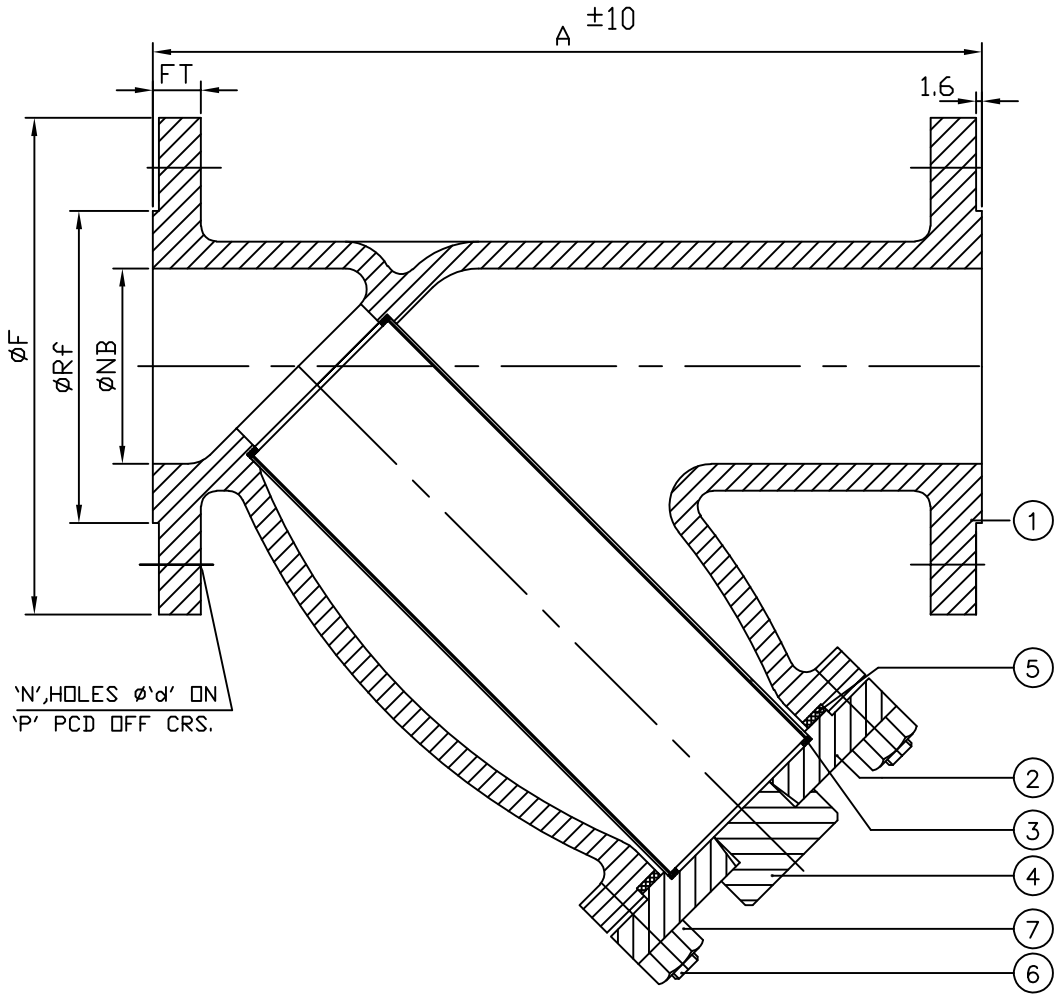


SIZE	øNB	A	øF	FT	øRf	'P'	ø'd'	'N'	QTY.
15	12.5	150	88.9	9.7	35	60.5	16	4	
25	25	160	108	11.2	51	79.2	16	4	
40	38	200	127	14.3	73	98.5	16	4	
50	50	230	152.4	15.9	92	120.6	19	4	
80	76	241	190.5	19.1	127	152.4	19	4	
100	100	292	228.6	23.9	157	190.5	19	8	
125	125	404	255	25.4	185.7	215.9	22.2	8	
150	150	470	280	25.4	216	241.3	22.2	8	
200	200	600	345	28.6	270	298.5	22.2	8	
250	250	622	405	30.6	323	362	25.4	12	
300	300	699	485	32.2	387	431.8	25.4	12	
350	350	740	535	35.4	414	476.3	28.5	12	

ALL DIMENSIONS ARE IN mm UNLESS IT SPECIFIED.

Sr.No.	PARTS NAME	WCB	CF8	CF8M
7	NUT	A 194 Gr.H2	A 194 Gr.8	A 194 Gr.8M
6	STUD	A 193 Gr.B7	A 193 Gr.B8	A 193 Gr.B8M
5	GASKET	GRAPHOIL/PTFE		
4	PLUG	M.S.+ZINC	SS304	SS316
3	SCREEN	SS304	SS304	SS316
2	COVER	WCB	CF8	CF8M
1	BODY	WCB	CF8	CF8M

BILL OF MATERIAL

CONSTRUCTION:	BOLTED COVER WITH DRAIN PLUG TYPE 'Y' TYPE STRAINER.
DESIGN & MFG. CODE	MFG. STD.
INSPECTION & TESTING	API 598
FACE TO FACE	MFG. STD.
END CONNECTION	ASME B 16.5 R/F 150 #

HYDRO TEST PRESSURE
SHELL
32 kg/cm²

TITLE:	'Y' TYPE STRAINER 150 #				
DRG. NO.	AEW/STY/150/15-350			SHEET 1 OF 1	
AEW	DATE	MADE	CHKD.	APRD.	DESCRIPTION	REV.
	24.02.22	P.D.N.	H.R.P.	J.A.C.	FOR APPROVAL	0
	AEW VALVES PVT. LTD. AHMEDABAD					